SHAPER™

649 SERIES

649 Direct/Indirect Trimmed Arm Mount Luminous Bowl.





649 STANDARD

Sample Number: 649-CFL/2-347V-PC

Series	Lamp	Voltage	Finish	Options
649= Trimmed Arm Mount Luminous Bowl	CFL/2/26 CFL/2/32 INC/2/75	120V 277V[1] 347V[1]	NA (standard), CC, MW, PB, PC, PCP, PN, SAL, SB, SC, SCL, SCP, SN, SNL	DL DM[2] REM[3] FB

Notes:
1. Available with CFL only.
2. Consult the factory for available options.
3. Supplied by others.

MATERIAL
Aluminum arm and wall canopy. Aluminum or cold rolled steel trim. Matte white acrylic bowl.

BALLAST
Integral Electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a mounting plate with an integral tenon for a standard 4" J-box or plaster ring.

LAMP/SOCKET
Two (2) 26W or 32W (GX24q-3) 4-pin triple CFL lamps or two (2) 75W A-19 lamps. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W-250V. Lamps furnished by others.

FINISH AND OPTIONS
See page 1020 for finish details and options.

651 SERIES

651 features a classic, Half Pyramid geometric with indirect illumination and an optional open bottom version.

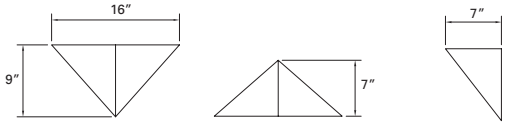

Sample Number: 651-CFL/1-347V-PCP

Series	Lamp	Voltage	Finish	Options
651=Half Pyramid	CFL/1/26 CFL/1/32 CFL/1/42 INC/1/75	120V 277V[1] 347V[1]	OBZ MB, MW (standard), CC, PB, PC, PCP, PN, SB, SC, SCL, SCP, SN, SNL	DAP DL DM[2] OB REM[3] HL

Notes:
1 Available with CFL only.
2 Consult the factory for available options.
3 Supplied by others.

MATERIAL
Painted or plated cold-rolled steel, solid formed bronze for OBZ finish.

BALLAST
Integral electronic HPF multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

LAMP/SOCKET
One (1) 26W (GX24q-3), 32W (GX24q-3) or 42W (GX24q-4) 4-pin triple tube CFL lamp or one (1) 75W A-19 lamp. CFL socket injection molded plastic. INC socket fired ceramic rated for 660W/250V Lamps furnished by others.

FINISH AND OPTIONS
See page 1020 for finish details and options.

652 SERIES

652 Direct Cylinder with Luminous Edge and a double arm wall bracket.



652 CFL

Sample Number: 652-CFL/1/26-120V-NA

Series	Lamp	Voltage	Finish	Options
652 = Direct Cylinder w/ Luminous Edge	CFL/1/26 CFL/1/32 INC/1/75 PARH/1	120V 277V[1] 347V[1]	NA (standard) CC, MW, PCP, SAL, SCP	DL REM[2]

Notes:
1. CFL only.
2.Supplied by others.

MATERIAL
Solid aluminum. 1/4" Matte acrylic edge(s).

BALLAST
Integral electronic HPF, multi-volt 120/277V (347V Canada), thermally protected with end-of-life circuitry to accommodate the specified lamp wattage.

INSTALLATION
Supplied with a universal circular strap for a standard 4" J-box or plaster ring.

LAMP/SOCKET
One (1) 26W or 32W (GX24q-3) 4-pin triple CFL lamps, one (1) 50WPAR20H or 75WPAR30 lamp or one (1) 75W A-19 lamp.

FINISH AND OPTIONS
See page 1020 for finish details and options.